




12345678910

本公司智慧财产未经许可不得复制
ning biao copyright may not be used without permission from ning biao.

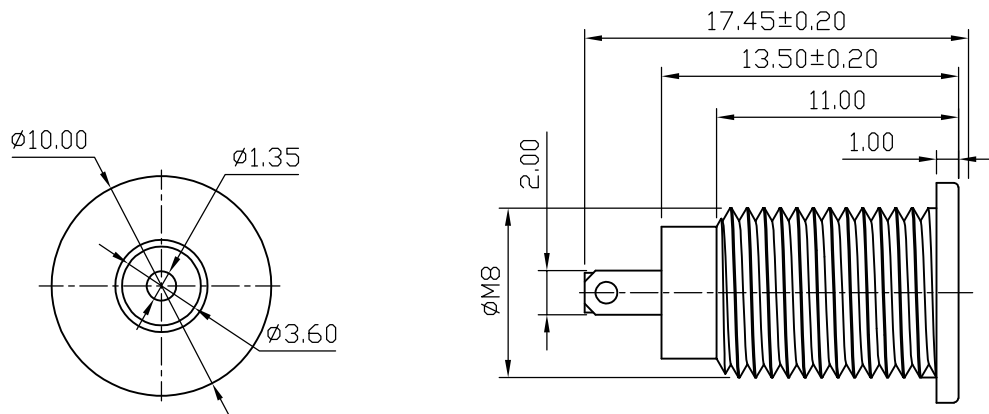

CIRCUIT

螺帽

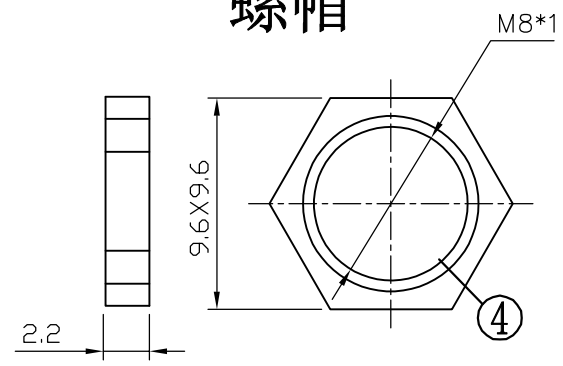

技术要求

- 1. 额定值: DC 30V 1A;
- 2. 接触电阻: $\leq 30m\Omega$;
- 3. 绝缘电阻: $\geq 100M\Omega$;
- 4. 耐压: AC500V (50Hz) 1min;
- 5. 插拔力: 3-30N;
- 6. 使用温度范围: -30-70℃;
- 7. 使用寿命: 5000次;



5	基座	DC-099A-05	PPA		1	黑
4	螺帽	DC-099A-04	锌合金	铜锡	1	
3	弹片	DC-099A-03	磷铜 C5191 T=0.25	铜锡	1	
2	铜套	DC-099A-02	黄铜 H59	铜锡	1	
1	圆针	DC-099A-01	黄铜棒 H62	铜锡	1	$\phi 1.35$
序号	零件名称	编号	材料	电镀	数量	备注

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE		DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED			2024. 09. 05	DC-099A
X.X	± 0.20	SIZE	A4	CHKD
X.XX	± 0.15	REV	A	DATE
X.XXX	± 0.10	UNIT	mm	MODEL
	$\pm 2^\circ$	SCALE	3:1	SHEET
		APPD	DATE	1/1
		PRINT DATE		2025.02.13