




(ø3.50mm 4 POLE PLUG DETAIL DRAWING)



3D VIEW

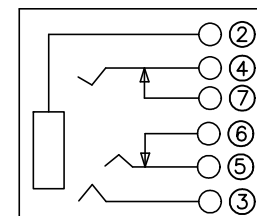

CIRCUIT







TABLE A:

ITEM	PART NUMBER	COLOR	PACK
01	ST-266-T00-061B-P	BLACK	吸塑盒
02	ST-266-T00-061R-P	RED	吸塑盒
03	ST-266-T00-061G-P	GREEN	吸塑盒
04	ST-266-T00-061g-P	GRAY	吸塑盒
05	ST-266-T00-061O-P	ORANGE	吸塑盒
06	ST-266-T00-061B-R	BLACK	卷带包

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 m Ω MAX.;
3. INSULATION RESISTANCE: 100M Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 0.3~3.0Kg f (3~30N).;
7. CONNECTOR UNMATING FORCES: 0.3~3.0Kg f (3~30N).;

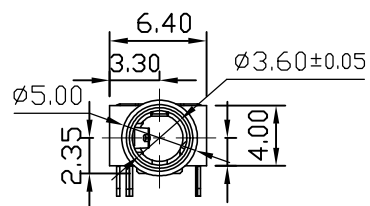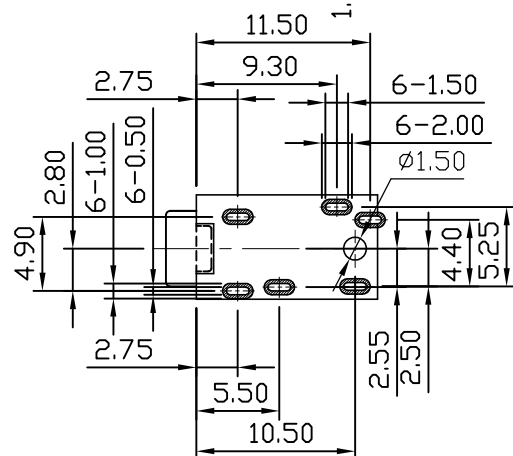

RECOMMENDED P.C.BLAYOUT
TOP VIEW(TOLRANCE:±0.05)



 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd					
TOLERANCE				DESIGN	DATE	TITLE	PHONE JACK		
UNLESS OTHERWISE STATED				WYF	2024. 09. 23				
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	ST-266-T		
X.XX	±0.15	REV	A						
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3		
	±2°	SCALE	2:1			PRINT DATE	2025.07.07		