


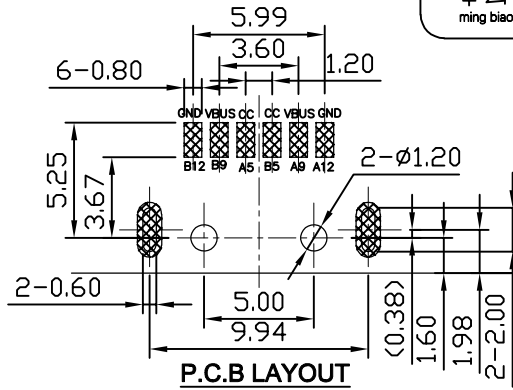
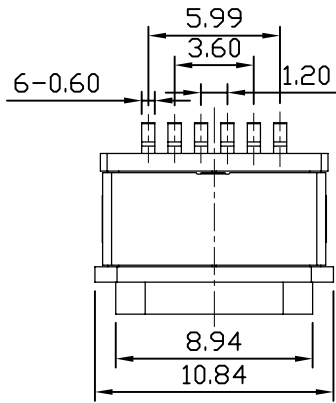
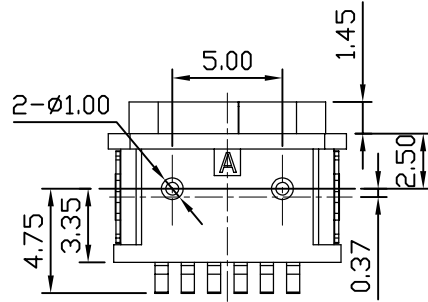


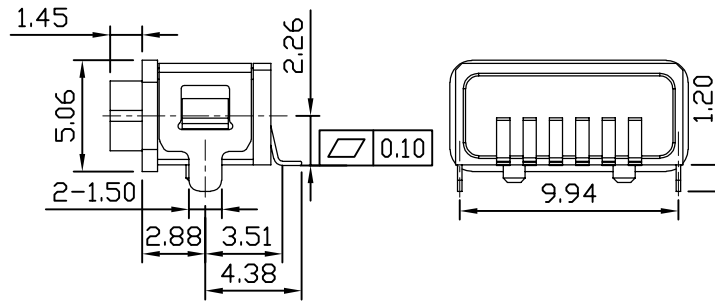


本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

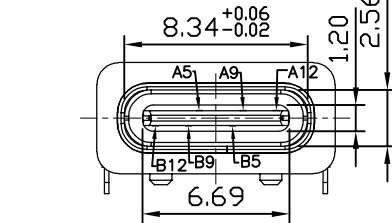

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

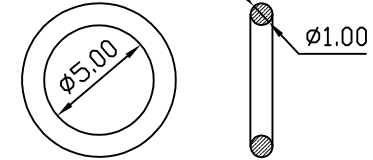

注: 防水圈是圆形截面, 直径为1.0mm的
硅胶圈, 防水圈挤压量, 由1.0mm挤压到
0.5mm ~ 0.6mm, 防水效果好
还有一种方形1.5mm厚胶圈可选择

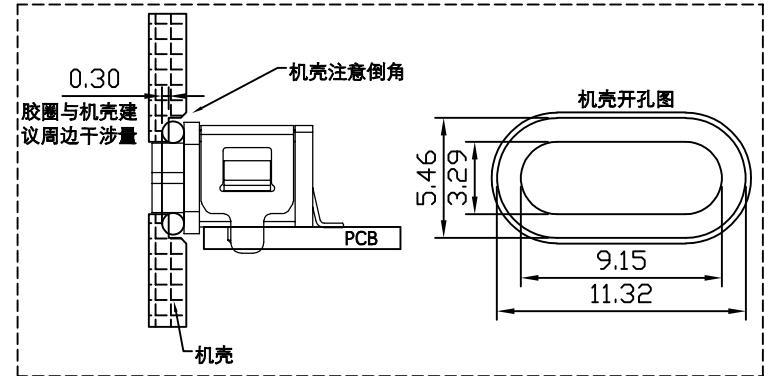

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY:10,000 CYCLES
- WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.



ROHS COMPLIANT Pb-Free Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN WYJ	DATE 2024. 06. 27	TITLE Connector	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	USBC-0032IPX8-00
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
∠	±2°	SCALE	3:1			PRINT DATE	2025.02.18