

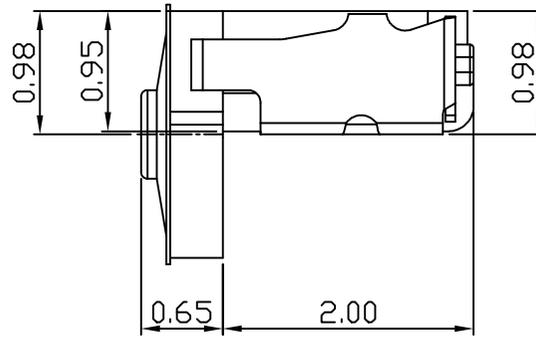
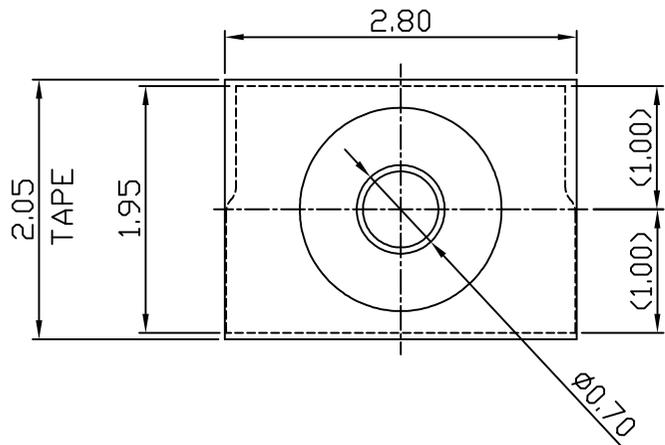
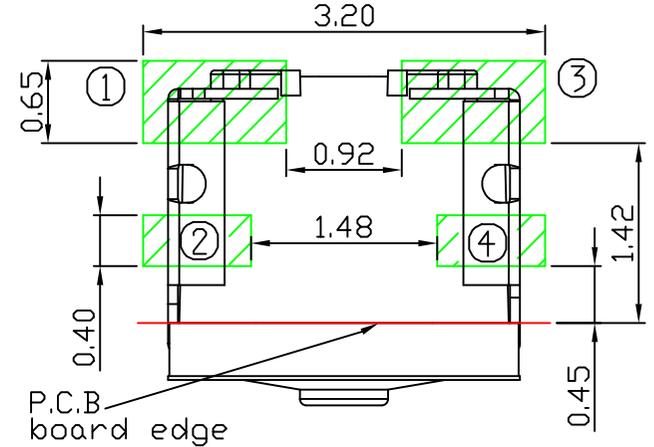




本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

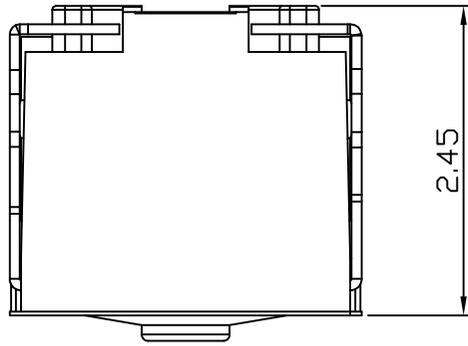

SPECIFICATIONS:

Contact Rating: 10uA, 2V DC to 20mA, 15V DC
 Contact Resistance: 500mΩ max.
 Insulation Resistance: 50MΩ min. 100V DC
 Dielectric Strength: 250V AC/1 minute
 Operating Force: 160±50gf
 Travel : 0.15±0.05mm
 Operating Life: 300,000 cycles
 Operating Temp: -40°~+85°
 Storage Temp: -40°~+85°

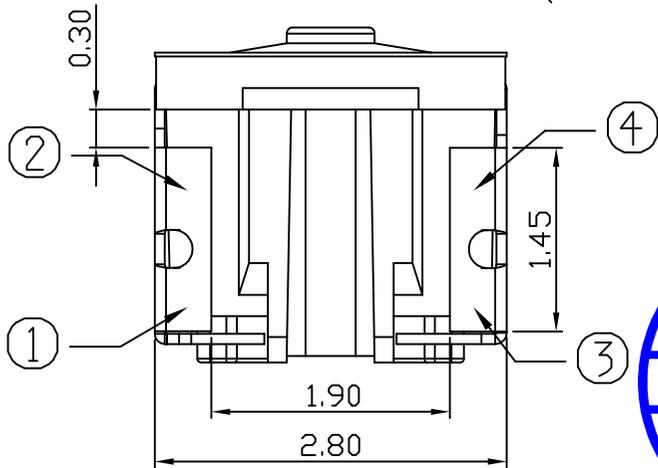

				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED				Wby	2025.09.01			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TAM15-BWJ-R	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1	
∠	±2°	SCALE	8:1			PRINT DATE	2026.01.31	