

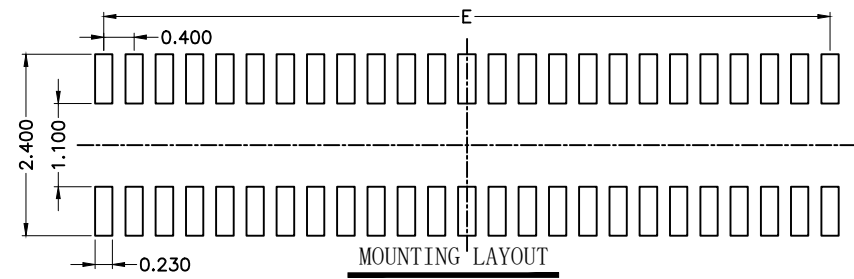
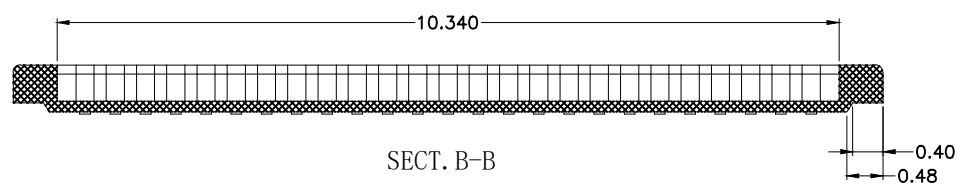
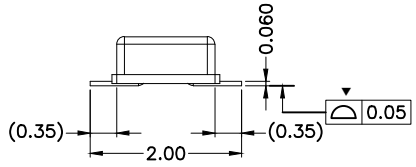
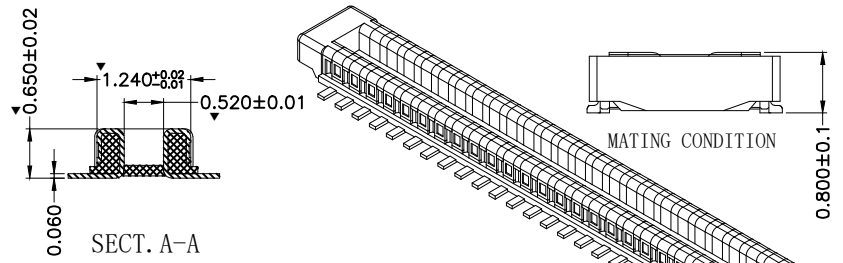


版本	变更日期	变更内容	责任人	备注
B	2022. 11. 25	扩pin	Liuzheng	

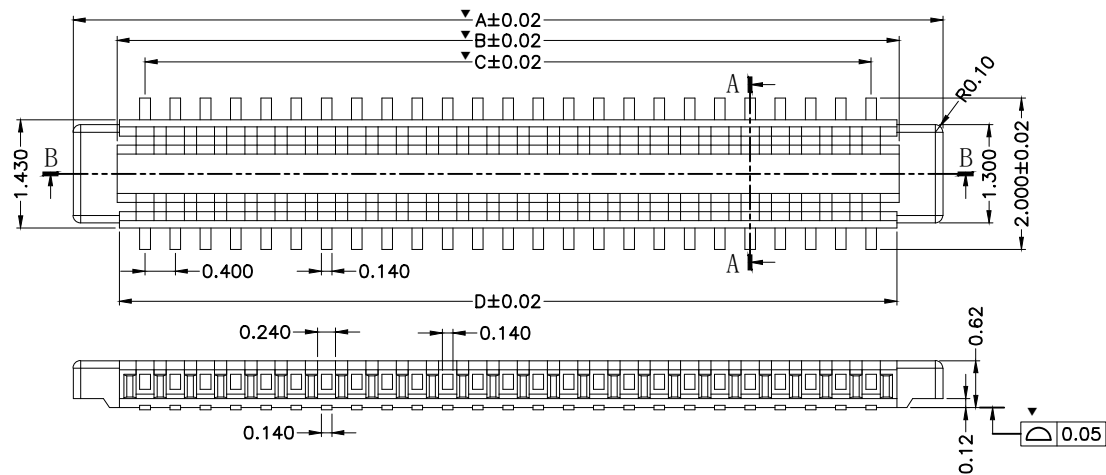

仅供参考

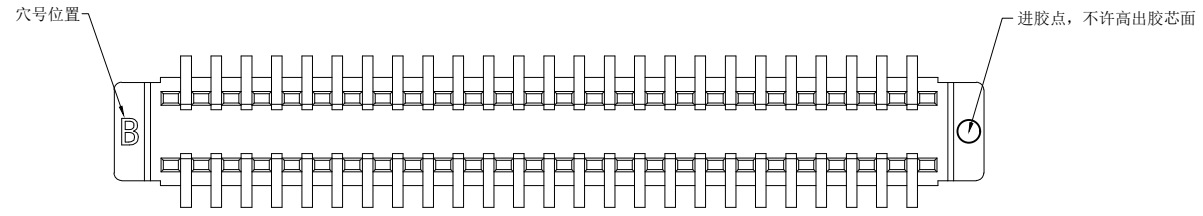

PIN数	A	B	C	D	E
50	11.50	10.34	9.60	10.28	9.60
40	9.50	8.34	7.60	8.28	7.60
34	8.30	7.14	6.40	7.08	6.40
30	7.50	6.34	5.60	6.28	5.60
24	6.30	5.14	4.40	5.08	4.40
16	4.700	3.540	2.800	3.480	2.80
10	3.50	2.34	1.60	2.28	1.60

- 备注:
1. 塑胶材质: LCP UL 94V-0 BLACK;
 2. 毛边最大0.03mm, 厚0.05mm;
 3. 产品不可有明显的缩水, 烧焦, 发白, 缺胶, 端子包胶等问题;
 4. 零件必须符合RoHS要求;
 5. ▼符号为QIP管控尺寸;
 6. 模穴号 (A, B, C.....);
 7. 中转收料10K PCS/盘;
 8. 产品几何中心位置不能设顶出位;
 9. 端子接地片共面度在0.05mm以内, 正位度0.02mm以内;
 10. 进胶口采用底部细水口进胶;

MIB-001MXXX-40

SERIAL NUMBER _____ PICTH 0.40mm

M: PLUG NUMBER OF CONTACTS _____

F: SOCKET

X,±	X°,±	UNITS mm	NAME<INTENDED USE>	东莞市铭标电子科技有限公司
.X± 0.1	.X°± 1°	MAT'L	MANUFACTURE	
.XX± 0.02	.XX°± 0.5°	N/A	PART NO.<INTENDED USE>	TITLE:
.XXX± 0.015	.XXX°±	FINISH	APPD:	I/M
THE GENERATED DRAWING IS BY ACAD, PROE OR IDEAS.DO NOT CHANGE BY HAND.			Q'TY	DWG NO:
			CHKD:	MIB-001MXXX-40
			DR:	SCALE SHEET REV.
				1:1 1/1 B