
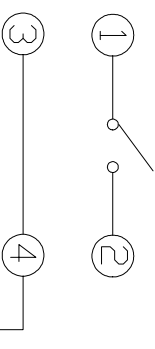
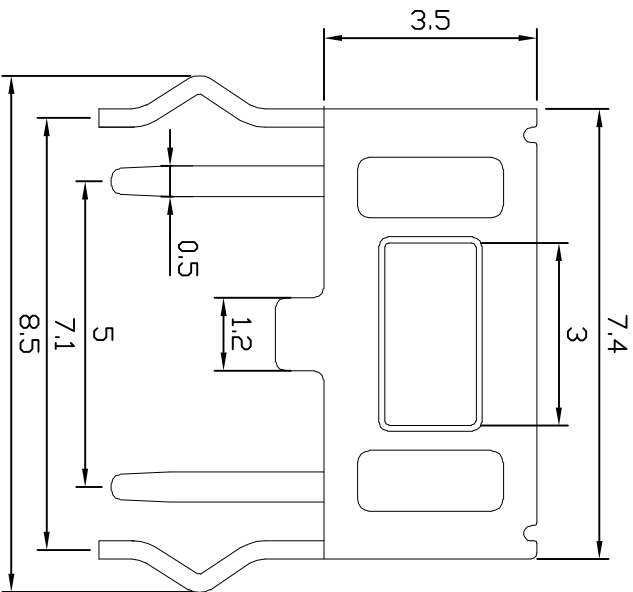
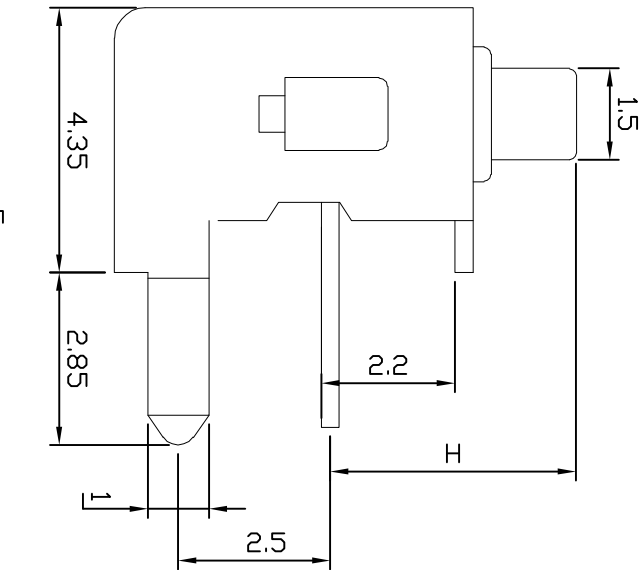


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao




CIRCUIT

SPECIFICATIONS:

材料：
本体：PPA (黑色)
按钮：PPA (白色)
卡件：黄铜 (镀银)
弹片：不锈钢 (覆银)
盖板：铁盖板 (镀铜锡)

Operating temperature range: -20°C to +70°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.25 ± 0.10mm
Operating force: 250 ± 40gf

P.C.B LAYOUT

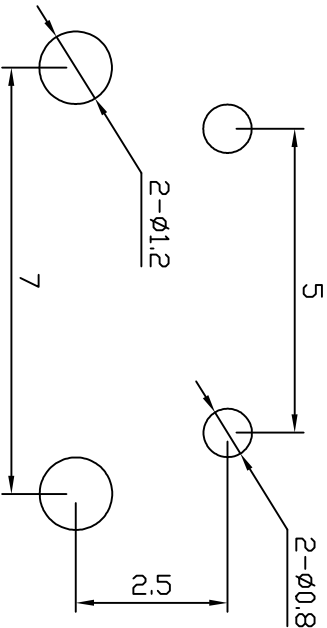

H

对应高度

3.35 4.3h

3.85 4.8h

4.05 5h

4.35 5.3h

4.55 5.5h

4.85 6h

5.35 7h



Rohs COMPLIANT Pb-Free Halogen Free				DESIGN DATE 2025.03.17 TITLE Tact Switch			
UNLESS OTHERWISE STATED				DATE 2025.03.17			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	THCP17
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm	SCALE	8:1	PRINT DATE	2025.07.07