
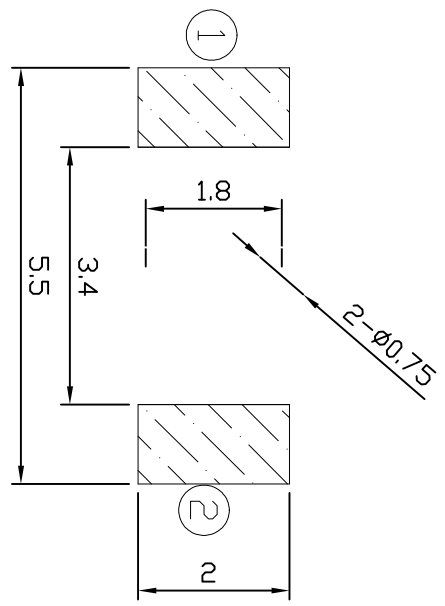
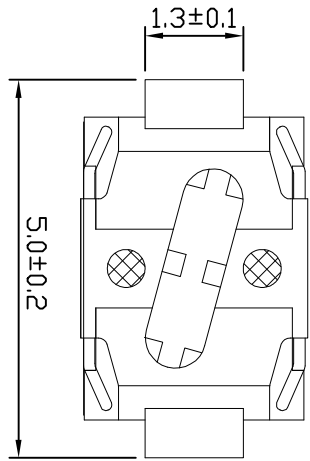
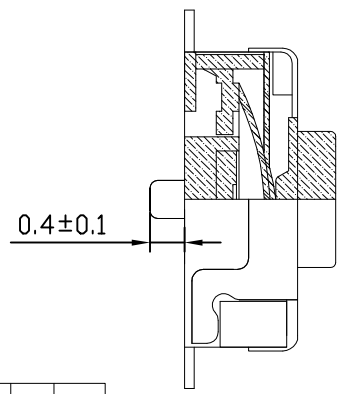



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

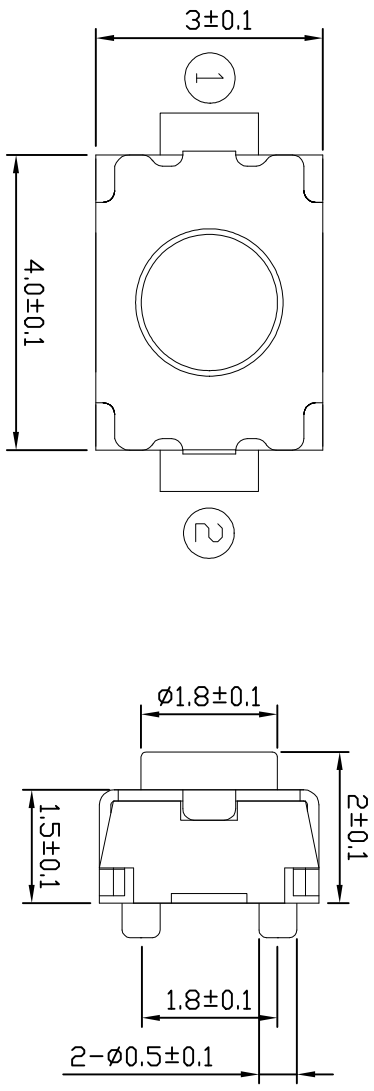

P.C.B. LAYOUT

height	model selection
H=1.8mm	V
H=2.0mm	
H=2.5mm	
H=3.0mm	
Operating force	model selection
130gf 40gf	
160gf 40gf	
260gf 50gf	

SPECIFICATIONS:

Operating temperature range: -30°C to +85°C
Rating: 50mA 12V DC Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.15±0.05mm
Operating force: 260±50gf



Rohs COMPLIANT Pb-free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025.03.12		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVBF13-A020CB-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	10:1			PRINT DATE	2025.08.12